



A

B

C

D

E

F

A


B

C

D

E

F

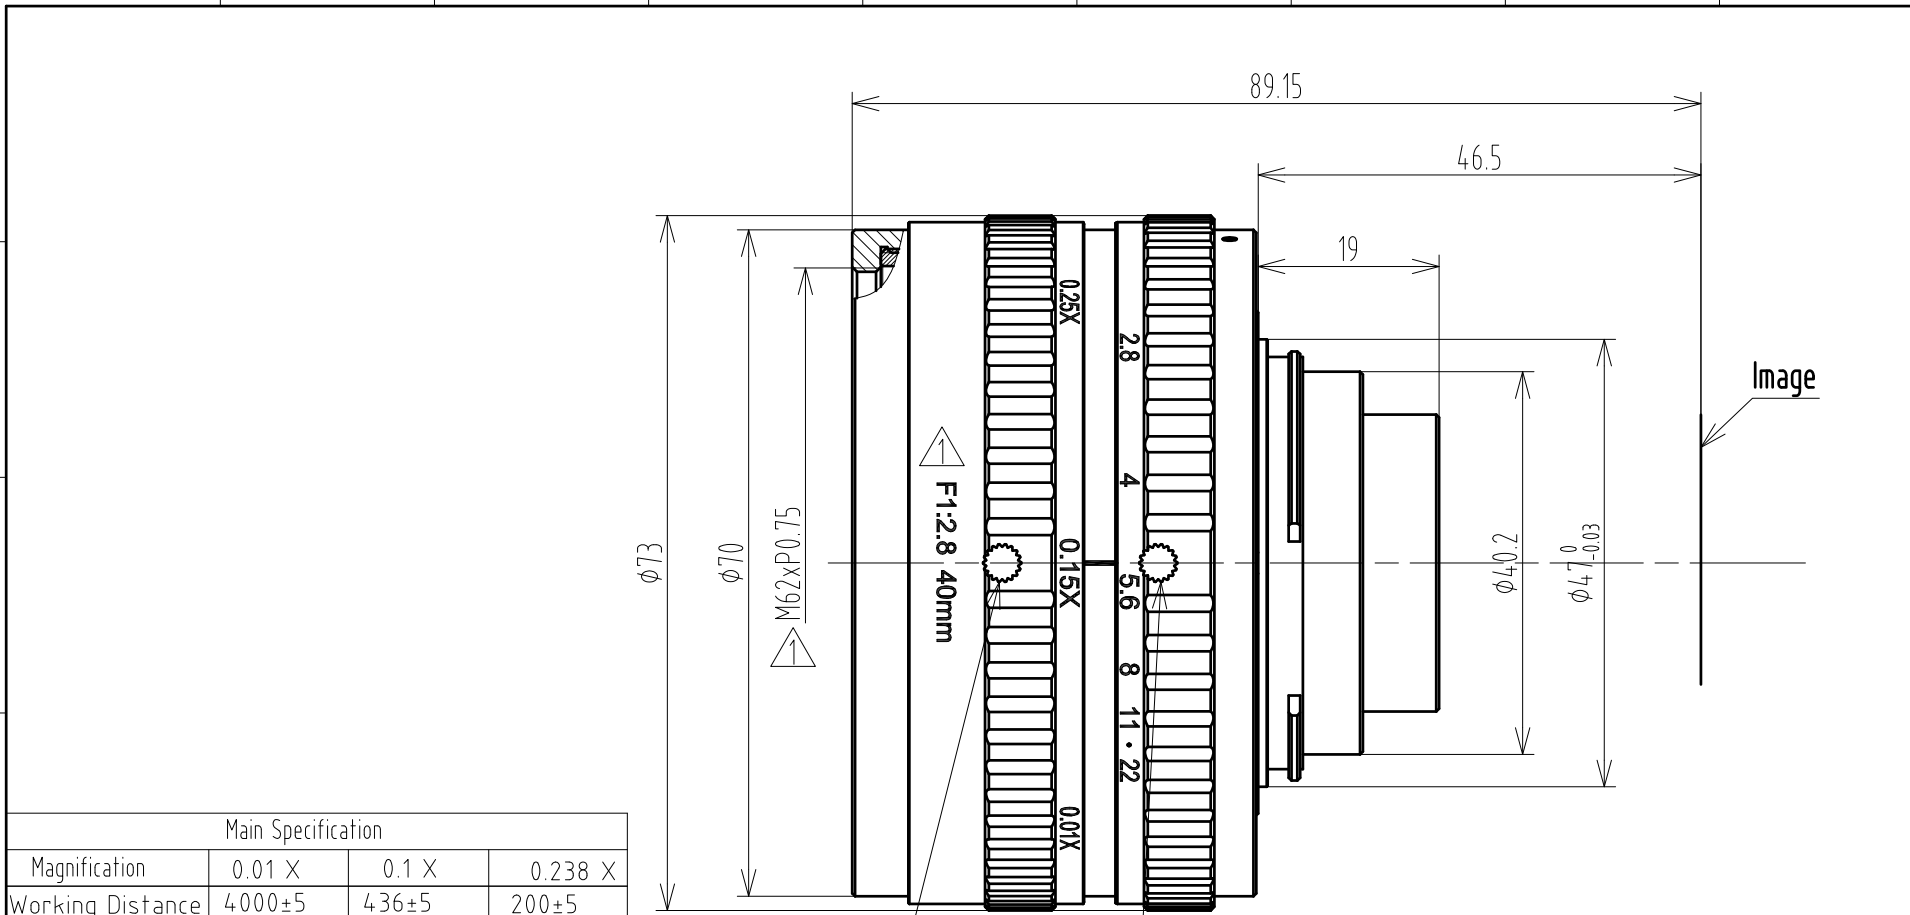

Main Specification			
Magnification	0.01 X	0.1 X	0.238 X
Working Distance	4000±5	436±5	200±5
Conjugate Distance	4054.8±9	468.67±9	264.15±9
Flange Focal Distance	46.5	46.5	46.5
Distortion	<-0.2%	<-0.2%	<-0.2%
FOV	1085.3	402.9	130.8
EFL	40		
Max image	φ43.2		
F.No	2.8~22		
Mount	F-Mount		
Focus distance	0.2m~∞		
Filter screw size	M62×P0.75		
Illumination	40%		
IMAGE QUALITY			
AXIS	φ30	φ43	
80lp/mm	50lp/mm	40lp/mm	

							TOLERANCE : LINEARITY TOLERANCES ±0.05 ANGULAR TOLERANCES ARE ±30° DRAFT ANGLES AREA ±0.5°/SIDE	三角法 	材料(环保)	单位	比例
										mm	1:1
						设计			名称	MF4010A技术规格图	页码
						校对					1/1
						审核			代号	MF4010A-SPEC	版本
						批准					V1
标记	处数	更改文件号	担当	变更日期							

1

2

3

4

5

6

7

8

9

A4